



General data

Company

Dafo Ecoenergias S.L.

Date

31/08/2016

The aim of BIOGAS3 project is to promote the sustainable production of renewable energy from the biogas obtained of agricultural residues and food and beverage industry waste in small-scale concept for energy self-sufficiency. This project is co-funded by the Intelligent Energy Europe Programme of the European Union, Contract N°:IEE/13/SI2.675801.

smallBIOGAS is a software tool to develop economic and sustainability analysis in order to evaluate the viability of small-scale anaerobic digestion installations (ca. or less than 100 kWel; 372308 m³biogas/year, 65% CH₄). The tool is adapted to the conditions of all participating countries of the project (France, Germany, Ireland, Italy, Poland, Spain and Sweden).

The results obtained from the use of this calculation tool are intended to provide the user with a guide about the viability of a small-scale biogas plant. The authors recommend further consultation with expert centres before investing in any biogas facility. The authors and promoters of this software tool accept no responsibility for any damages resulting from the use made of the tool smallBIOGAS.

Input from user

Output from smallBIOGAS tool

Location data

Country	Spain	
Administrative division	Castilla y León Zamora	
Annual average temperature	12,7	°C
Percentage of wastes located at a distance equal or less than 10 km from the agro-food company	100	%
Percentage of wastes located at a distance higher than 10 km from the agro-food company	0	%

Biogas production process data

Anaerobic digestion process	Wet	
Annual amount of waste introduced in the digester (fresh matter)	8.030,00	t/year
Annual amount of waste introduced in the digester (dry matter)	642,40	t/year
Annual amount of waste introduced in the digester (dry organic matter)	513,92	t/year
Annual amount of organic matter degraded	289,34	t/year
Needs of dilution water (only for wet digestion processes)	0	m3/year
Digestate recirculation rate	0	%
Needs of waste in terms of dry matter to concentrate (only for dry digestion)	0	t/year
Total amount of digestate produced (fresh matter)	7.747,98	t/year
Volume of anaerobic digester	645,12	m³
Hydraulic retention time	27,86	days
Thermal energy required for the heating of the anaerobic digester	291,94	MWh/year
Gross methane production (annual)	104.325,76	Nm3/year
Gross biogas production (annual)	171.306,67	Nm3/year
Gross biogas production (average per hour)	19,56	Nm3/h
Excessive digestate recirculation (if recirculation rate is >30%)	No	
Ammonia inhibition risk	No	
C/N ratio out of range	C/N too low (8)	

Use of the biogas 1 (Co-generation)

Data of the biogas valorisation system

Use of biogas in	Co-generation	
Use of produced electric energy	Self-consumption	
Use of produced thermal energy	Sale	
Use of produced biomethane	No	
Needs of thermal energy near to the biogas plant	0,00	MWh/year
Needs of electric energy near to the biogas plant	62,50	MWh/year
Production of electricity in cogeneration	311,72	MWh/year
Electric power installed in cogeneration system (CHP)	40,91	kW
Thermal energy production in cogeneration	472,31	MWh/year
Unrecovered thermal energy in cogeneration system	0,00	MWh/year
Thermal recovery coefficient of the cogeneration system	0,197	
Energy efficiency coefficient of the cogeneration system	0,564	
Investment in cogeneration system	87.451,38	€
Income or savings (sale or use of the electricity)	9.375,00	€/year
Income or savings (sale or use of the thermal energy)	5.411,05	€/year

Energy storage

Volume of the gasometer	234,67	m³
Self-consumed energy	20,05 e 61,81 t	%
Comments		

Economic viability analysis. Investment project

Investment	253.080,52	€
Biogas plant	165.629,14	€
Biogas valorisation system	87.451,38	€
Other	0,00	€
Income	30.436,97	€/year
Sale of Electricity, Thermal energy	5.411,05	€/year
Energy savings	9.375,00	€/year
Waste management	0,00	€/year
Other incomes	0,00	€/year
Sale or saving (sale or use) of digestate	15.650,92	€/year
Selling price of electric energy	0,00	c€/kWh
Selling price of thermal energy	3,00	c€/kWh
Selling price of biomethane	0,00	c€/kWh
Expenses	13.695,33	€/year
Operating and maintenance (O&M)	1.521,85	€/year
Staff	4.143,48	€/year
Transport and handling of waste	8.030,00	€/year
Cost of waste (co-substrates)	0,00	€
Transport of digestate	0,00	€
Other expenses	0,00	€/year
O&M as percentage of the sale of products and energy savings	5,00	%
Labour intensity	0,0002	h/t·d
Labour cost	10,00	€/h
Days worked per year	258,00	working day
Unit handling cost	1,00	€/t

Economic viability analysis. Financial study of the investment project.

Financing	253.080,52	€
Subsidies	0,00	€
Own funding	0,00	€
Loans	253.080,52	€
Percentage of subsidies	0,00	%
Percentage of own funding	0,00	%
Percentage of loan	100,00	%
Interest rate of loan	4,70	%

Financial indicators


Gross operating profit or earnings before interest, taxes, depreciation and amortization (EBITDA)	16.741,64	€/year
Net present value (NPV)	-57.348,38	€
NPV/initial investment	-0,227	-
Internal return rate (IRR)	-3,28	%
Payback period	>15	years
Weighted Average Cost of Capital (WACC)	3,29	%
Capital Recovery Factor (CRF)	8,55	%

Environmental viability analysis

Primary energy obtained from the recovery of the biogas	765,33	MWh/year
Savings of CO2 emissions	212,76	t/year
Savings in artificial fertilizers	30514	kgN/year
Utilization of the digestate in	Vulnerable area	
Cultivation area required for application of digestate	179,49	ha

Overview


Investment (M€)

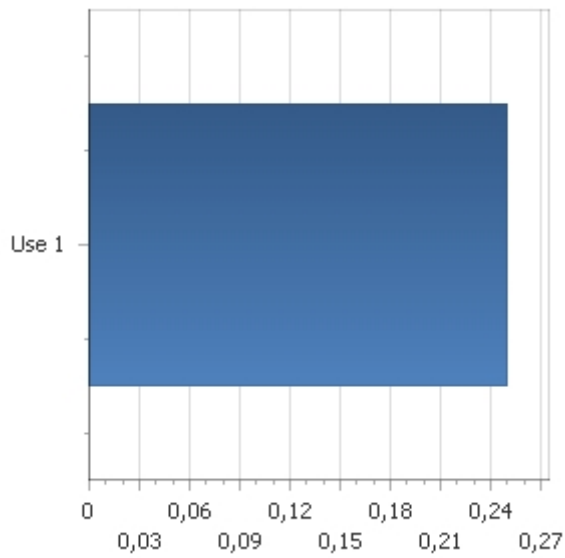


Payback period (years)



CO2-eq emissions savings (t/year)

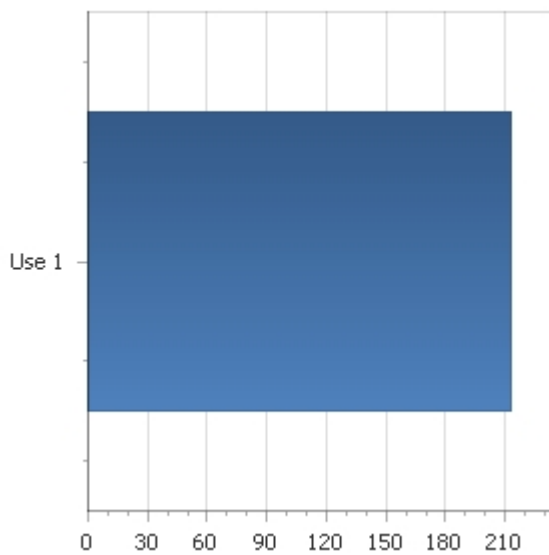

Self-consumed energy (%)

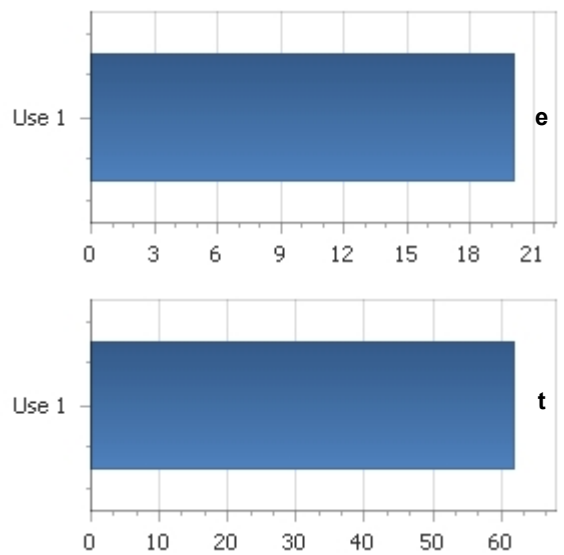

The sole responsibility for the content of this report lies with the authors. It does not necessarily reflect the opinion of the European Union. Neither the EACI nor the European Commission are responsible for any use that may be made of the information contained therein